




Double Wire Screw (DWS)

Zinc Plated Steel Double Wire Screw Hose Clamps



HCL's Double Wire Screw Clamps are highly suited to soft and semi-rigid hoses, with spiral or braided reinforcement; as well as aluminum foil ducting.

Made from Zinc Plated Steel they are available in sizes that cover hose diameters from 9.5 to 210mm.

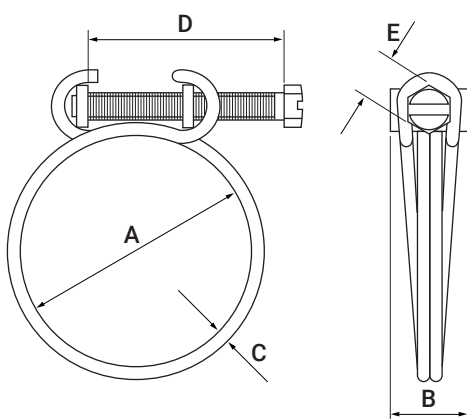

PRODUCT INFORMATION

RoHS Compliant:	Yes
Hazardous Goods:	No
HS Tariff Code:	7326 90 92

MATERIAL INFORMATION

Band:	W1
	Zinc Plated Steel





Part Number HCL	Min Dia (A)		Max Dia (A)		Band Width (B)		Hex Screw Length (D)		Hex Screw A/F (E)			
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch		
DWS-012	9.5	0.37	12.0	0.47	11.3	0.45	25.0	0.98	5.5 / M3	0.22		
DWS-013	10.5	0.41	13.0	0.51								
DWS-014	11.5	0.45	14.0	0.55								
DWS-015	12.5	0.49	15.0	0.59								
DWS-016	13.0	0.51	16.0	0.63								
DWS-017	13.5	0.53	17.0	0.67								
DWS-018	15.0	0.59	18.0	0.71								
DWS-019	15.5	0.61	19.0	0.75								
DWS-020	17.0	0.67	20.0	0.79								
DWS-021	17.5	0.69	21.0	0.83								
DWS-022	18.5	0.73	22.0	0.87	14.3	0.56	30.0	1.18	7.0 / M4	0.28		
DWS-023	19.0	0.75	23.0	0.91								
DWS-024	20.0	0.79	24.0	0.94								
DWS-025	21.5	0.85	25.0	0.98								
DWS-027	23.5	0.93	27.0	1.06								
DWS-029	25.0	0.98	29.0	1.14								
DWS-031	27.0	1.06	31.0	1.22								
DWS-033	29.0	1.14	33.0	1.30								
DWS-035	30.5	1.20	35.0	1.38								
DWS-037	33.0	1.32	37.0	1.46								
DWS-040	35.5	1.40	40.0	1.57								
DWS-043	38.5	1.52	43.0	1.69								
DWS-046	41.0	1.61	46.0	1.81	15.3	0.61	40.0	1.58	8.0 / M5	0.32		
DWS-049	43.5	1.71	49.0	1.93								
DWS-053	46.5	1.83	53.0	2.09								
DWS-056	50.5	1.99	56.0	2.20								
DWS-060	53.5	2.11	60.0	2.36								
DWS-064	56.5	2.22	64.0	2.52								
DWS-068	60.0	2.36	68.0	2.68	17.5	0.69	50.0	1.97	10.0 / M6	0.39		
DWS-072	64.0	2.52	72.0	2.83								
DWS-076	68.5	2.70	76.0	2.99								
DWS-080	72.5	2.85	80.0	3.15								
DWS-084	76.5	3.01	84.0	3.31								
DWS-088	80.0	3.15	88.0	3.46								
DWS-092	84.0	3.31	92.0	3.62								
DWS-096	88.0	3.46	96.0	3.78								
DWS-100	92.0	3.62	100.0	3.94								
DWS-104	95.0	3.74	104.0	4.09								
DWS-108	98.0	3.86	108.0	4.25								
DWS-112	103.0	4.06	112.0	4.41								
DWS-116	109.0	4.29	116.0	4.57								
DWS-120	111.0	4.37	120.0	4.72								
DWS-124	115.0	4.53	124.0	4.88								
DWS-128	117.0	4.61	128.0	5.04								
DWS-132	124.0	4.88	132.0	5.20								
DWS-140	125.0	4.92	140.0	5.51								
DWS-150	135.0	5.31	150.0	5.91			80.0	3.15				
DWS-160	145.0	5.71	160.0	6.30								
DWS-165	150.0	5.91	165.0	6.50								
DWS-170	155.0	6.10	170.0	6.69								
DWS-180	165.0	6.50	180.0	7.09								
DWS-190	175.0	6.89	190.0	7.48								
DWS-200	185.0	7.28	200.0	7.87								
DWS-210	195.0	7.68	210.0	8.27								

