




Double Wire Spring (DW)

Zinc Plated Steel Double Wire Hose Clamps



HCL's Double Wire Spring hose clips are ideal on rubber and PVC hoses. Made from Zinc Plated steel the spring effect compensates for diametrical variation and the complete circle guarantees a uniform radial pressure.

These Double Wire Spring Hose Clips are ideal for low pressure applications.

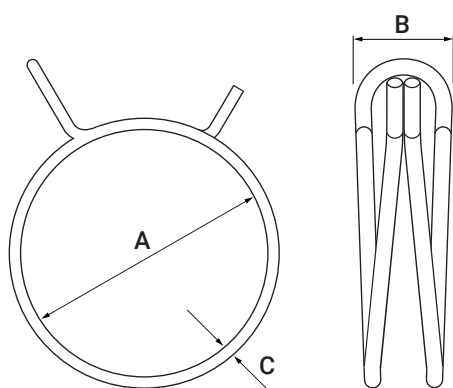

PRODUCT INFORMATION

RoHS Compliant:	Yes
Hazardous Goods:	No
HS Tariff Code:	7326 90 92

MATERIAL INFORMATION

	W1
Band:	Zinc Plated Steel





Part Number HCL	Min Dia (A)		Max Dia (A)		Band Width (B)	
	mm	inch	mm	inch	mm	inch
DW-6.1	5.8	0.23	6.4	0.25	5.0	0.45
DW-6.8	6.6	0.26	7.0	0.28		
DW-7.3	7.0	0.28	7.5	0.30	5.2	0.21
DW-7.6	7.3	0.29	7.8	0.31		
DW-8.1	7.8	0.31	8.3	0.33	5.5	0.22
DW-8.6	8.3	0.33	8.8	0.35		
DW-9.1	8.8	0.35	9.3	0.37		
DW-9.6	9.3	0.37	9.9	0.39		
DW-10.1	9.8	0.39	10.4	0.41	6.3	0.25
DW-10.7	10.4	0.41	11.0	0.43		
DW-11.3	11.0	0.43	11.6	0.46		
DW-11.9	11.6	0.46	12.3	0.48	7.3	0.29
DW-12.6	12.1	0.48	13.1	0.52		
DW-13.3	12.9	0.51	13.6	0.54		
DW-13.7	13.3	0.52	14.1	0.56		
DW-14.0	13.6	0.54	14.4	0.57	8.4	0.33
DW-14.8	14.4	0.57	15.1	0.59		
DW-15.6	14.8	0.58	15.9	0.63		
DW-15.8	15.5	0.61	16.3	0.64		
DW-16.4	15.9	0.63	16.8	0.66	8.8	0.35
DW-17.3	16.8	0.66	17.7	0.70		
DW-18.2	17.7	0.70	18.7	0.74		
DW-19.2	18.7	0.74	19.6	0.77		
DW-20.2	19.6	0.77	20.6	0.81	10.7	0.42
DW-21.2	20.6	0.81	21.6	0.85		
DW-22.1	21.5	0.85	22.6	0.89		
DW-22.6	22.0	0.87	23.1	0.91		
DW-23.1	22.5	0.89	24.0	0.94	11.4	0.45
DW-24.2	23.5	0.93	24.7	0.97		
DW-25.2	24.4	0.96	26.0	1.02		
DW-25.8	25.1	0.99	26.4	1.04		
DW-26.3	25.8	1.02	27.4	1.08	12.8	0.50
DW-27.5	26.7	1.05	28.1	1.11		
DW-28.7	27.9	1.10	29.4	1.16		
DW-30.0	29.3	1.15	30.9	1.22		
DW-31.3	30.4	1.20	32.0	1.26	14.0	0.55
DW-32.7	32.0	1.26	34.1	1.34		
DW-34.1	33.2	1.31	34.8	1.37		
DW-35.0	33.9	1.33	35.7	1.41		
DW-35.6	34.6	1.36	36.4	1.43	14.8	0.58
DW-37.5	36.2	1.43	38.0	1.50		
DW-38.8	37.7	1.48	39.7	1.56		
DW-39.6	38.5	1.52	40.5	1.59		
DW-40.5	39.4	1.55	41.4	1.63	15.8	0.62
DW-41.5	40.7	1.60	42.3	1.67		
DW-42.2	41.0	1.67	43.2	1.70		
DW-44.0	42.5	1.77	45.5	1.79		
DW-45.8	45.0	1.81	47.0	1.92	16.7	0.66
DW-47.0	46.0	1.83	49.0	1.89		
DW-49.8	48.4	1.91	50.9	1.93		
DW-52.0	50.6	1.99	53.2	2.00		
DW-54.2	52.7	2.07	55.4	2.09	16.7	0.66
DW-56.0	54.4	2.14	57.4	2.18		
DW-57.4	56.0	2.20	58.8	2.26		
DW-59.6	58.2	2.29	61.0	2.31		
DW-64.0	62.0	2.44	66.0	2.40	16.7	0.66
DW-69.0	67.0	2.64	71.0	2.80		

